


Screwdrivers – Non Shut Off – Push and Lever Start

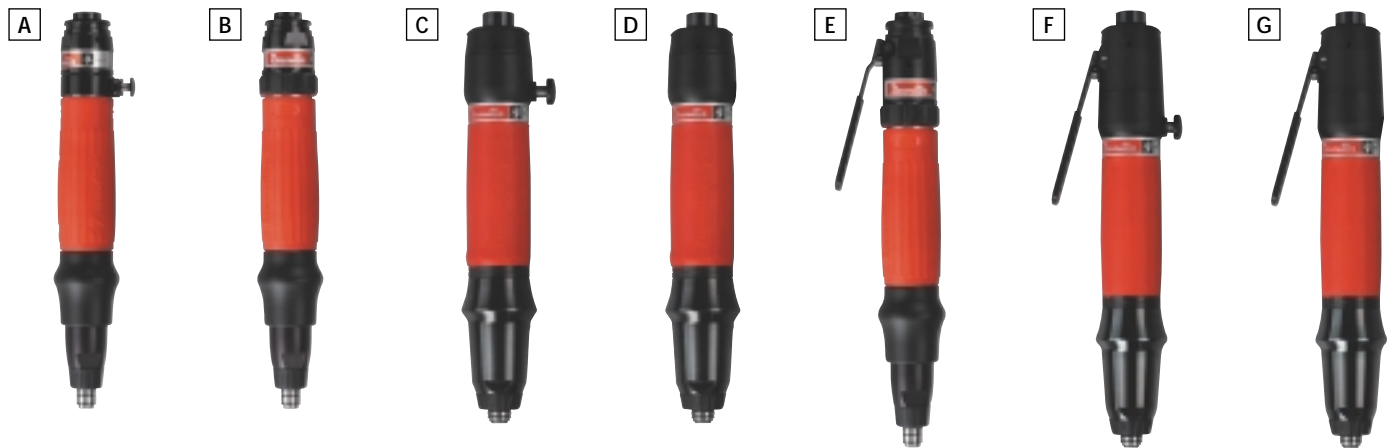

PUSH START

PICTURE REF	TOOL TYPE	PART NUMBER	FREE SPEED	OUTPUT ⁽¹⁾	TORQUE RANGE	FITTED SPRING	LENGTH	WEIGHT	AIR FLOW	AIR HOSE BORE	AIR INLET ⁽²⁾	SOUND LEVEL	VIBRATION
			r/min	hex	in lb	in lb	ins	lb	scfm	ins	NPT	dB(A)	ms ⁻²
A	SC024-AB2300-R4Q	1461894	2300	1/4"	4.4-21.2	4.4-15.9	9.8	1.34	13.8	1/4"	1/8"	75	2-5
A	SC022-AB1600-R4Q	1461904	1600	1/4"	4.4-19.4	7.1-19.4	9.8	1.34	13.8	1/4"	1/8"	75	3-9
A	SC044-AB1100-R4Q	1461914	1100	1/4"	3.5-38.9	11.5-38.9	9.8	1.34	13.8	1/4"	1/8"	75	9-35
A	SC044-AB550-R4Q	1461924	550	1/4"	3.5-38.9	8.9-38.9	9.8	1.34	13.8	1/4"	1/8"	75	10-29
B	SC024-A2300-R4Q	1456614	2300	1/4"	4.4-21.2	4.4-15.9	9.8	1.34	13.8	1/4"	1/8"	73	2-5
B	SC022-A1600-R4Q	1456624	1600	1/4"	4.4-19.4	7.1-19.4	9.8	1.34	13.8	1/4"	1/8"	73	3-9
B	SC044-A1100-R4Q	1456634	1100	1/4"	3.5-38.9	11.5-38.9	9.8	1.34	13.8	1/4"	1/8"	73	9-35
B	SC044-A550-R4Q	1456644	550	1/4"	3.5-38.9	8.9-38.9	9.8	1.34	13.8	1/4"	1/8"	73	10-29
C	SD023-AB3500-R4Q	1462954	3500	1/4"	8.9-20.3	8.9-20.3	8.9	1.61	18.4	3/8"	1/4"	73	TBA
C	SD035-AB2200-R4Q	1462944	2200	1/4"	8.9-31.0	8.9-31.0	8.9	1.61	18.4	3/8"	1/4"	73	TBA
C	SD055-AB1470-R4Q	1462934	1470	1/4"	17.7-48.6	17.7-48.6	10	1.96	18.4	3/8"	1/4"	73	16.1
C	SD075-AB1100-R4Q	1462924	1100	1/4"	22.1-66.3	22.1-66.3	10	1.96	18.4	3/8"	1/4"	73	14.9
C	SD100-AB820-R4Q	1462914	820	1/4"	31.0-88.5	31.0-88.5	10	1.96	18.4	3/8"	1/4"	73	TBA
C	SD140-AB510-R4Q	1462904	510	1/4"	31.0-88.5	31.0-88.5	10	1.96	18.4	3/8"	1/4"	73	14.7
D	SD023-AR3500-R4Q	1462894	3500	1/4"	8.9-20.3	8.9-20.3	8.9	1.61	18.4	3/8"	1/4"	73	TBA
D	SD035-AR2200-R4Q	1462884	2200	1/4"	8.9-31.0	8.9-31.0	8.9	1.61	18.4	3/8"	1/4"	73	TBA
D	SD055-AR1470-R4Q	1462874	1470	1/4"	17.7-48.6	17.7-48.6	10	1.96	18.4	3/8"	1/4"	73	16.1
D	SD075-AR1100-R4Q	1462864	1100	1/4"	22.1-66.3	22.1-66.3	10	1.96	18.4	3/8"	1/4"	73	14.9
D	SD100-AR820-R4Q	1462854	820	1/4"	31.0-88.5	31.0-88.5	10	1.96	18.4	3/8"	1/4"	73	TBA
D	SD140-AR510-R4Q	1462844	510	1/4"	31.0-88.5	31.0-88.5	10	1.96	18.4	3/8"	1/4"	73	14.7

LEVER START

PICTURE REF	TOOL TYPE	PART NUMBER	FREE SPEED	OUTPUT ⁽¹⁾	TORQUE RANGE	FITTED SPRING	LENGTH	WEIGHT	AIR FLOW	AIR HOSE BORE	AIR INLET ⁽²⁾	SOUND LEVEL	VIBRATION
			r/min	hex	in lb	in lb	ins	lb	scfm	ins	NPT	dB(A)	ms ⁻²
E	SC024-L2300-R4Q	1456694	2300	1/4"	4.4-21.2	4.4-15.9	9.8	1.34	13.8	1/4"	1/8"	75	2-5
E	SC022-L1600-R4Q	1456704	1600	1/4"	4.4-19.4	7.1-19.4	9.8	1.34	13.8	1/4"	1/8"	75	3-9
E	SC044-L1100-R4Q	1456714	1100	1/4"	3.5-38.9	11.5-38.9	9.8	1.34	13.8	1/4"	1/8"	75	9-35
E	SC044-L550-R4Q	1456724	550	1/4"	3.5-38.9	8.9-38.9	9.8	1.34	13.8	1/4"	1/8"	75	10-29
F	SD023-LB3500-R4Q	1463214	3500	1/4"	8.9-20.3	8.9-20.3	9.9	1.67	18.4	3/8"	1/4"	73	TBA
F	SD035-LB2200-R4Q	1463204	2200	1/4"	8.9-31.0	8.9-31.0	9.9	1.67	18.4	3/8"	1/4"	73	TBA
F	SD055-LB1470-R4Q	1463194	1470	1/4"	17.7-48.6	17.7-48.6	10.9	2.02	18.4	3/8"	1/4"	73	16.1
F	SD075-LB1100-R4Q	1463184	1100	1/4"	22.1-66.3	22.1-66.3	10.9	2.02	18.4	3/8"	1/4"	73	14.9
F	SD100-LB820-R4Q	1463174	820	1/4"	31.0-88.5	31.0-88.5	10.9	2.02	18.4	3/8"	1/4"	73	TBA
F	SD140-LB510-R4Q	1463164	510	1/4"	31.0-88.5	31.0-88.5	10.9	2.02	18.4	3/8"	1/4"	73	14.7
G	SD023-LR3500-R4Q	1463154	3500	1/4"	8.9-20.3	8.9-20.3	9.9	1.67	18.4	3/8"	1/4"	73	TBA
G	SD035-LR2200-R4Q	1463144	2200	1/4"	8.9-31.0	8.9-31.0	9.9	1.67	18.4	3/8"	1/4"	73	TBA
G	SD055-LR1470-R4Q	1463134	1470	1/4"	17.7-48.6	17.7-48.6	10.9	2.02	18.4	3/8"	1/4"	73	16.1
G	SD075-LR1100-R4Q	1463124	1100	1/4"	22.1-66.3	22.1-66.3	10.9	2.02	18.4	3/8"	1/4"	73	14.9
G	SD100-LR820-R4Q	1463114	820	1/4"	31.0-88.5	31.0-88.5	10.9	2.02	18.4	3/8"	1/4"	73	TBA
G	SD140-LR510-R4Q	1463104	510	1/4"	31.0-88.5	31.0-88.5	10.9	2.02	18.4	3/8"	1/4"	73	14.7

⁽¹⁾ Types A, B and F, 5/16" hex bit optional

⁽²⁾ BSP optional

A side handle should be fitted for torques over 35 in lb (SD tools are supplied with a side handle as standard)

Screwdrivers – Non Shut Off – Pistol Grip



PUSH AND TRIGGER START

PICTURE REF	TOOL TYPE	PART NUMBER	FREE SPEED	OUTPUT ⁽¹⁾	TORQUE RANGE	FITTED SPRING	LENGTH	WEIGHT	AIR FLOW	AIR HOSE BORE	AIR INLET ⁽²⁾	SOUND LEVEL	VIBRATION
			r/min	hex	in lb	in lb					ins		
A	SBP024-T2300-R4Q	1462184	2300	1/4"	4.4-21.2	4.4-21.2	7.2	1.80	13.8	1/4"	1/8"	73	0.9-2.5
A	SBP022-T1600-R4Q	1462194	1600	1/4"	4.4-19.4	4.4-19.4	7.2	1.80	13.8	1/4"	1/8"	73	1.8-3.2
A	SBP044-T1100-R4Q	1462204	1100	1/4"	3.5-38.9	15.9-38.9	7.2	1.80	13.8	1/4"	1/8"	73	2.3-3.9
A	SBP044-T550-R4Q	1462214	550	1/4"	3.5-38.9	15.9-38.9	7.2	1.80	13.8	1/4"	1/8"	73	1.7-4.7

TRIGGER START

PICTURE REF	TOOL TYPE	PART NUMBER	FREE SPEED	OUTPUT ⁽¹⁾	TORQUE RANGE	FITTED SPRING	LENGTH	WEIGHT	AIR FLOW	AIR HOSE BORE	AIR INLET ⁽²⁾	SOUND LEVEL	VIBRATION
			r/min	hex	in lb	in lb					ins		
B	SCP024-T2300-R4Q	1456774	2300	1/4"	4.4-21.2	4.4-15.9	9.0	1.89	13.8	1/4"	1/8"	73	0.9-2.5
B	SCP022-T1600-R4Q	1456784	1600	1/4"	4.4-19.4	7.1-19.4	9.0	1.89	13.8	1/4"	1/8"	73	1.8-3.2
B	SCP044-T1100-R4Q	1456794	1100	1/4"	3.5-38.9	11.5-38.9	9.0	1.89	13.8	1/4"	1/8"	73	2.3-3.9
B	SCP044-T550-R4Q	1456804	550	1/4"	3.5-38.9	8.9-38.9	9.0	1.89	13.8	1/4"	1/8"	73	1.7-4.7
C	SCPT024-A2300-R4Q	1458994	2300	1/4"	4.4-21.2	4.4-15.9	9.1	1.89	13.8	1/4"	1/8"	73	0.9-2.5
C	SCPT022-A1600-R4Q	1458954	1600	1/4"	4.4-19.4	7.1-19.4	9.1	1.89	13.8	1/4"	1/8"	73	1.8-3.2
C	SCPT044-A1100-R4Q	1458914	1100	1/4"	3.5-38.9	11.5-38.9	9.1	1.89	13.8	1/4"	1/8"	73	2.3-3.9
C	SCPT044-A550-R4Q	1458874	550	1/4"	3.5-38.9	8.9-38.9	9.1	1.89	13.8	1/4"	1/8"	73	1.7-4.7
D	2D8-PX-2200	1455574	2200	1/4"	5.3-31.8	5.3-13.3	7.8	2.42	17.0	3/8"	1/4"	72	1.4-2.6
D	2D8-PX-1500	1455554	1500	1/4"	13.3-60.1	13.3-39.8	8.3	2.42	17.0	3/8"	1/4"	72	3.1-3.8
D	2D8-PX-850	1455534	850	1/4"	13.3-60.1	13.3-39.8	8.3	2.42	17.0	3/8"	1/4"	72	2.5-3.4
D	2D8-PX-540	1455514	540	1/4"	13.3-88.5	31.9-60.1	8.3	2.42	17.0	3/8"	1/4"	72	3.7-4.7
D	2D8-PX-340	1455494	340	1/4"	13.3-88.5	31.9-60.1	8.3	2.42	17.0	3/8"	1/4"	72	<2.5
E	2F8-PX-2000	1236884	2000	1/4"	5.3-39.8	13.3-39.8	7.7	2.86	19.9	3/8"	1/4"	82	<2.5
E	2F8-PX-1100	1236624	1100	1/4"	13.3-55.7	13.3-39.8	8.5	3.30	19.9	3/8"	1/4"	82	<2.5
E	2F8-PX-650	1235654	650	1/4"	13.3-70.8	31.8-70.8	8.5	3.30	19.9	3/8"	1/4"	82	<2.5
E	2F8-PX-450	1235814	450	1/4"	31.9-88.5	31.9-70.8	8.5	3.30	19.9	3/8"	1/4"	82	2.1-2.8
E	2F8-PX-750	1236384	750	1/4"	79.6-132.7	79.6-132.7	10.1	3.96	19.9	3/8"	1/4"	82	5.3-6.2
E	2F8-PX-500	1236044	500	1/4"	88.5-132.7	88.5-132.7	10.1	3.96	19.9	3/8"	1/4"	82	6.0-9.2

⁽¹⁾ Types B, C, D and E, 5/16" hex bit holder optional

⁽²⁾ BSP optional

⁽³⁾ Types B and C are available with a steel nose

A side handle should be fitted for torques over 88 in lb

Lou Zampini & Associates

2 Douglas Pike, Rt. 7

Smithfield, RI 02917

1 800 353 4676

FAX 1 401 679 0165

